

Centrifugal single stage pump for water recirculation and filtration

Applications

Water recirculation and filtration for small swimming pools.
Silent.
Self-priming up to 4m.

Motor

Asynchronous 2 poles.
IPX5 protection.
Class F insulation.
Built-in thermal protection.
Continuous operation.

Materials

Pump body, impeller, diffuser, suction and discharge in technopolymer.
Pump shaft in AISI 431.
Mechanical seal.
Motor casing in aluminium.
O-rings in NBR/EPDM.

Limitations

Maximum water temperature 40 °C.

Equipment


No cable.
Unions included 50mm and 1^{1/2}".



Hydraulic performance table

Model	I [A]	P1 [kW]	P2		c [μF]	l/min	25	50	75	100	150	200	250	290
	1~ 230V	1~	[kW]	[HP]			m³/h	1,5	3,0	4,5	6,0	9,0	12	15
Silen I 33 8	2	0,45	0,25	0,33	12		10,2	9,7	8,6	7,2	3,2	-	-	-
Silen I 50 12	2,8	0,65	0,37	0,5	12	m³/h	12,3	11,9	11,3	10,5	8,1	4,6	-	-
Silen I 100 15	3,8	0,85	0,75	1	12		13,8	13,3	13	12,5	10,8	8,1	4,8	1,8

Performance curve at 2900 rpm

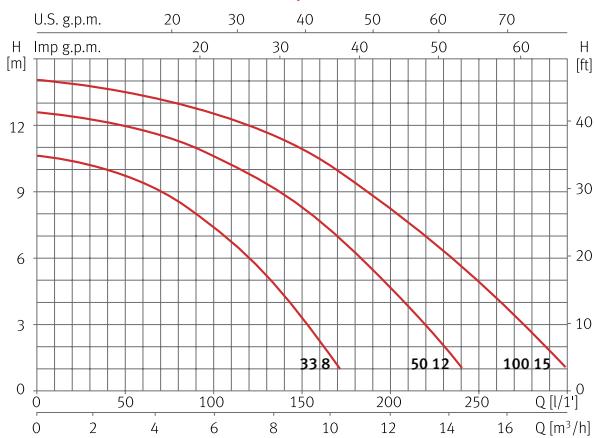

Dimension and weight

Model	A	B	C	D	E	F	G	I	J	K	L	Kg
Silen I 33	439	192	115	304	210	50	221	264	Ø9	108	212	8,9
Silen I 50	439	192	115	304	210	50	221	264	Ø9	108	212	10,2
Silen I 100	439	192	115	304	210	50	221	264	Ø9	108	212	10,9

